


RCCN 日成VDRF型环保阻燃线槽 Wide Slot Wiring Duct

推荐/Recommend

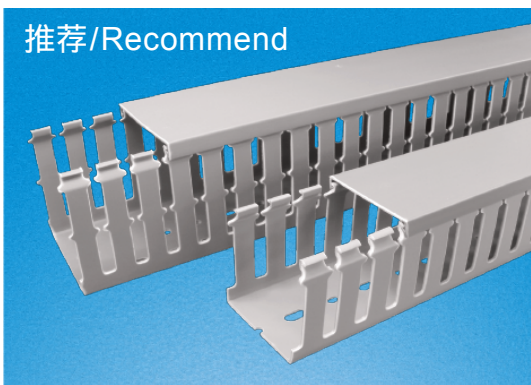

产品材质:采用低卤素硬质PVC料制成,环保无污染,不含铅等有毒物。
 产品认证:美国UL:E306674 欧洲CE 欧洲环保RoHS,REACH,铁道阻燃低烟。
 防火等级:UL94V-0,低烟微卤,遇火不燃烧,防火性及绝缘性特佳。
 产品构造:由槽底及槽盖组成,底槽两侧设有出线孔。
 颜色:灰色.白色.蓝色.黑色(可定制其它颜色,有起订量要求)
 工作温度:静态-40°C持续高温至65°C,短时间可达85°C。
 使用方法:先将底槽固定,将所要配的线装入槽内,盖上槽盖即可。
 产品特性:1.反扣式槽盖与槽体设计组合后绝不脱落,且接合面平滑,不割伤手及擦损附近配线。
 2.配线槽65°C内不易断裂,变形,变色,装配省时便利。
 3.出线孔低、组合容易、拆卸简单、易于配线。

更多选择:量大可按需求生产所需规格或定制长度.例:VDR8080F(L=1.7M)

Wide slot/finger design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes.

Certificates:UL:E306674 CE:EN50085 RoHS,REACH. Made of rigid PVC

Work temperature:-40 °c to 65 °c

UL94 Flammability Rating of V-0

Provided with mounting holes


Available color:gray.white.blue.black and other special colors

Special length come with MOQ request



推荐:灰色为常规库存产品,其它颜色有起订量要求。

Comment : gray is the common color, other color need more MOQ

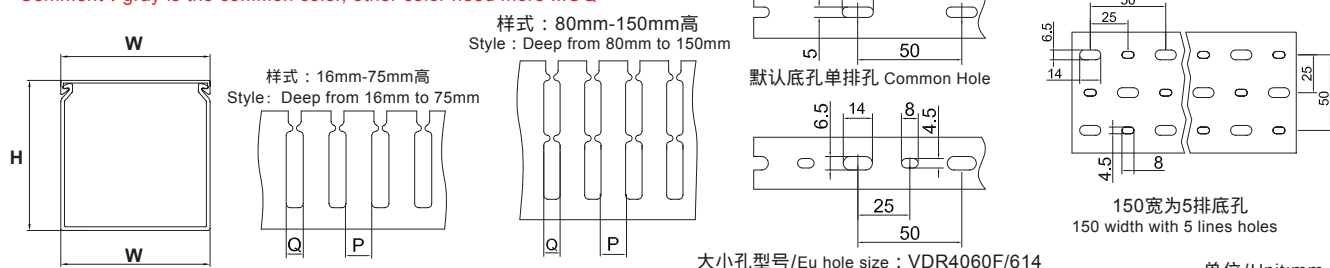

大小孔型号/Eu hole size : VDR4060F/614


单位/Unit:mm

型号 Item No.				宽 × 高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
VDR1616F	VDR1616FW	VDR1616FE	VDR1616FB	16×16	8	10	3~10pcs	每支 2米
VDR2516F	VDR2516FW	VDR2516FE	VDR2516FB	25×16	8	10	8~12pcs	
VDR1520F	VDR1520FW	VDR1520FE	VDR1520FB	15×20	8.5	12	8~12pcs	
VDR2020F	VDR2020FW	VDR2020FE	VDR2020FB	20×20	8.5	12	10~20pcs	
VDR4020F	VDR4020FW	VDR4020FE	VDR4020FB	40×20	8	12	15~30pcs	
VDR1525F	VDR1525FW	VDR1525FE	VDR1525FB	15×25	8	10	5~15pcs	
VDR2025F	VDR2025FW	VDR2025FE	VDR2025FB	20×25	8	10	5~15pcs	
VDR2525F	VDR2525FW	VDR2525FE	VDR2525FB	25×25	8	10	10~25pcs	
VDR3025F	VDR3025FW	VDR3025FE	VDR3025FB	30×25	8	10	12~28pcs	
VDR4025F	VDR4025FW	VDR4025FE	VDR4025FB	40×25	8	10	20~35pcs	
VDR5025F	VDR5025FW	VDR5025FE	VDR5025FB	50×25	8	10	12~28pcs	含槽底槽盖
VDR1530F	VDR1530FW	VDR1530FE	VDR1530FB	15×30	8	10	8~15pcs	
VDR2030F	VDR2030FW	VDR2030FE	VDR2030FB	20×30	8	12	25~35pcs	
VDR2530F	VDR2530FW	VDR2530FE	VDR2530FB	25×30	8	12	25~35pcs	
VDR3030F	VDR3030FW	VDR3030FE	VDR3030FB	30×30	8	12	25~35pcs	
VDR4030F	VDR4030FW	VDR4030FE	VDR4030FB	40×30	8	12	30~40pcs	
VDR5030F	VDR5030FW	VDR5030FE	VDR5030FB	50×30	8	12	40~50pcs	
VDR6030F	VDR6030FW	VDR6030FE	VDR6030FB	60×30	8	12	50~60pcs	
VDR2233F	VDR2233FW	VDR2233FE	VDR2233FB	22×33	6	10.5	25~35pcs	
VDR3333F	VDR3333FW	VDR3333FE	VDR3333FB	33×33	8	12	35~45pcs	
VDR2035F	VDR2035FW	VDR2035FE	VDR2035FB	20×35	8	12	30~40pcs	Including tuning and lids
VDR3535F	VDR3535FW	VDR3535FE	VDR3535FB	35×35	8	12	35~45pcs	
VDR5035F	VDR5035FW	VDR5035FE	VDR5035FB	50×35	8	12	40~60pcs	
VDR1540F	VDR1540FW	VDR1540FE	VDR1540FB	15×40	8	12	16~22pcs	
VDR2040F	VDR2040FW	VDR2040FE	VDR2040FB	20×40	8	12	16~22pcs	
VDR2540F	VDR2540FW	VDR2540FE	VDR2540FB	25×40	8	12	20~35pcs	
VDR3540F	VDR3540FW	VDR3540FE	VDR3540FB	35×40	8	12	30~45pcs	
VDR4040F	VDR4040FW	VDR4040FE	VDR4040FB	40×40	8	12	60~70pcs	
VDR6040F	VDR6040FW	VDR6040FE	VDR6040FB	60×40	8	12	100~115pcs	
VDR8040F	VDR8040FW	VDR8040FE	VDR8040FB	80×40	8	12	120~135pcs	
VDR10040F	VDR10040FW	VDR10040FE	VDR10040FB	100×40	8	12	120~135pcs	
VDR12040F	VDR12040FW	VDR12040FE	VDR12040FB	120×40	8	12	140~155pcs	

RCCN 日成VDRF型环保阻燃线槽 Wide Slot Wiring Duct

型号 Item No.				宽 × 高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
VDR2545F	VDR2545FW	VDR2545FE	VDR2545FB	25×45	8	12	20~25pcs	每支 2米
VDR3345F	VDR3345FW	VDR3345FE	VDR3345FB	33×45	8	12	40~55pcs	
VDR4545F	VDR4545FW	VDR4545FE	VDR4545FB	45×45	8	12	60~70pcs	
VDR6545F	VDR6545FW	VDR6545FE	VDR6545FB	65×45	8	12	110~120pcs	
VDR2050F	VDR2050FW	VDR2050FE	VDR2050FB	20×50	8	12	18~28pcs	
VDR2550F	VDR2550FW	VDR2550FE	VDR2550FB	25×50	8	12	20~30pcs	
VDR3050F	VDR3050FW	VDR3050FE	VDR3050FB	30×50	8	12	25~40pcs	
VDR3550F	VDR3550FW	VDR3550FE	VDR3550FB	35×50	8	12	40~60pcs	
VDR4050F	VDR4050FW	VDR4050FE	VDR4050FB	40×50	8	12	60~70pcs	
VDR4550F	VDR4550FW	VDR4550FE	VDR4550FB	45×50	8	12	70~80pcs	
VDR5050F	VDR5050FW	VDR5050FE	VDR5050FB	50×50	8	12	80~90pcs	每支 2米 含槽底槽盖
VDR5550F	VDR5550FW	VDR5550FE	VDR5550FB	55×50	8	12	85~95pcs	
VDR6050F	VDR6050FW	VDR6050FE	VDR6050FB	60×50	8	12	100~120pcs	
VDR7550F	VDR7550FW	VDR7550FE	VDR7550FB	75×50	8	12	150~170pcs	
VDR8050F	VDR8050FW	VDR8050FE	VDR8050FB	80×50	8	12	160~180pcs	
VDR10050F	VDR10050FW	VDR10050FE	VDR10050FB	100×50	8	12	200~250pcs	
VDR12555F	VDR12555FW	VDR12555FE	VDR12555FB	125×55	8	8	220~270pcs	
VDR2060F	VDR2060FW	VDR2060FE	VDR2060FB	20×60	8	12	35~45pcs	
VDR2560F	VDR2560FW	VDR2560FE	VDR2560FB	25×60	8	12	40~50pcs	
VDR3060F	VDR3060FW	VDR3060FE	VDR3060FB	30×60	8	12	60~80pcs	Pcs/Branch 2M Including tuning and lids
VDR3560F	VDR3560FW	VDR3560FE	VDR3560FB	35×60	8	12	90~105pcs	
VDR4060F	VDR4060FW	VDR4060FE	VDR4060FB	40×60	8	12	100~115pcs	
VDR4560F	VDR4560FW	VDR4560FE	VDR4560FB	45×60	8	12	110~125pcs	
VDR5060F	VDR5060FW	VDR5060FE	VDR5060FB	50×60	8	12	120~135pcs	
VDR6060F	VDR6060FW	VDR6060FE	VDR6060FB	60×60	8	12	120~135pcs	
VDR8060F	VDR8060FW	VDR8060FE	VDR8060FB	80×60	8	12	180~210pcs	
VDR10060F	VDR10060FW	VDR10060FE	VDR10060FB	100×60	8	12	240~290pcs	
VDR11060F	VDR11060FW	VDR11060FE	VDR11060FB	110×60	8	12	250~300pcs	
VDR12060F	VDR12060FW	VDR12060FE	VDR12060FB	120×60	8	12	260~320pcs	
VDR15060F	VDR15060FW	VDR15060FE	VDR15060FB	150×60	8	12	300~360pcs	每支 2米 含槽底槽盖
VDR2565F	VDR2565FW	VDR2565FE	VDR2565FB	25×65	8	12	40~50pcs	
VDR3365F	VDR3365FW	VDR3365FE	VDR3365FB	33×65	8	12	40~70pcs	
VDR4565F	VDR4565FW	VDR4565FE	VDR4565FB	45×65	8	12	110~120pcs	
VDR6565F	VDR6565FW	VDR6565FE	VDR6565FB	65×65	8	12	180~200pcs	
VDR7265F	VDR7265FW	VDR7265FE	VDR7265FB	72×65	8	12	180~230pcs	
VDR2575F	VDR2575FW	VDR2575FE	VDR2575FB	25×75	8	12	180~210pcs	
VDR3575F	VDR3575FW	VDR3575FE	VDR3575FB	35×75	8	12	180~210pcs	
VDR5075F	VDR5075FW	VDR5075FE	VDR5075FB	50×75	8	12	180~210pcs	
VDR7575F	VDR7575FW	VDR7575FE	VDR7575FB	75×75	8	12	200~240pcs	
VDR10075F	VDR10075FW	VDR10075FE	VDR10075FB	100×75	8	12	250~290pcs	每支 2米 含槽底槽盖
VDR2580F	VDR2580FW	VDR2580FE	VDR2580FB	25×80	8	12	100~120pcs	
VDR3080F	VDR3080FW	VDR3080FE	VDR3080FB	30×80	8	12	110~125pcs	
VDR3580F	VDR3580FW	VDR3580FE	VDR3580FB	35×80	8	12	110~130pcs	
VDR4080F	VDR4080FW	VDR4080FE	VDR4080FB	40×80	8	12	140~160pcs	
VDR4580F	VDR4580FW	VDR4580FE	VDR4580FB	45×80	8	12	140~160pcs	
VDR5080F	VDR5080FW	VDR5080FE	VDR5080FB	50×80	8	12	160~180pcs	
VDR5580F	VDR5580FW	VDR5580FE	VDR5580FB	55×80	8	12	160~180pcs	
VDR6080F	VDR6080FW	VDR6080FE	VDR6080FB	60×80	8	12	180~210pcs	
VDR8080F	VDR8080FW	VDR8080FE	VDR8080FB	80×80	8	12	240~290pcs	Pcs/Branch 2M Including tuning and lids
VDR10080F	VDR10080FW	VDR10080FE	VDR10080FB	100×80	8	12	260~350pcs	
VDR12080F	VDR12080FW	VDR12080FE	VDR12080FB	120×80	8	12	280~380pcs	
VDR14080F	VDR14080FW	VDR14080FE	VDR14080FB	140×80	8	12	350~450pcs	
VDR16080F	VDR16080FW	VDR16080FE	VDR16080FB	160×80	8	12	450~550pcs	
VDR25100F	VDR25100FW	VDR25100FE	VDR25100FB	25×100	8	12	110~160pcs	
VDR33100F	VDR33100FW	VDR33100FE	VDR33100FB	33×100	8	12	130~165pcs	
VDR40100F	VDR40100FW	VDR40100FE	VDR40100FB	40×100	8	12	130~175pcs	
VDR50100F	VDR50100FW	VDR50100FE	VDR50100FB	50×100	8	12	220~250pcs	
VDR60100F	VDR60100FW	VDR60100FE	VDR60100FB	60×100	8	12	240~290pcs	
VDR70100F	VDR70100FW	VDR70100FE	VDR70100FB	70×100	8	12	250~340pcs	每支 2米 含槽底槽盖
VDR75100F	VDR75100FW	VDR75100FE	VDR75100FB	75×100	8	12	260~350pcs	
VDR80100F	VDR80100FW	VDR80100FE	VDR80100FB	80×100	8	12	260~350pcs	
VDR100100F	VDR100100FW	VDR100100FE	VDR100100FB	100×100	8	12	300~400pcs	
VDR120100F	VDR120100FW	VDR120100FE	VDR120100FB	120×100	8	12	350~450pcs	
VDR150100F	VDR150100FW	VDR150100FE	VDR150100FB	150×100	8	12	400~650pcs	
VDR160100F	VDR160100FW	VDR160100FE	VDR160100FB	160×100	8	12	500~750pcs	
VDR100130F	VDR100130FW	VDR100130FE	VDR100130FB	100×130	8	12	350~450pcs	
VDR150130F	VDR150130FW	VDR150130FE	VDR150130FB	150×130	8	12	400~500pcs	
VDR200100F	VDR200100FW	VDR200100FE	VDR200100FB	200×100	8	12	600~800pcs	
VDR200150F	VDR200150FW	VDR200150FE	VDR200150FB	200×150	8	12	900~1200pcs	每支 2米 含槽底槽盖
VDR200200F	VDR200200FW	VDR200200FE	VDR200200FB	200×200	8	12	1200~1600pcs	

RCCN 日成VDRF型环保阻燃线槽 Wide Slot Wiring Duct

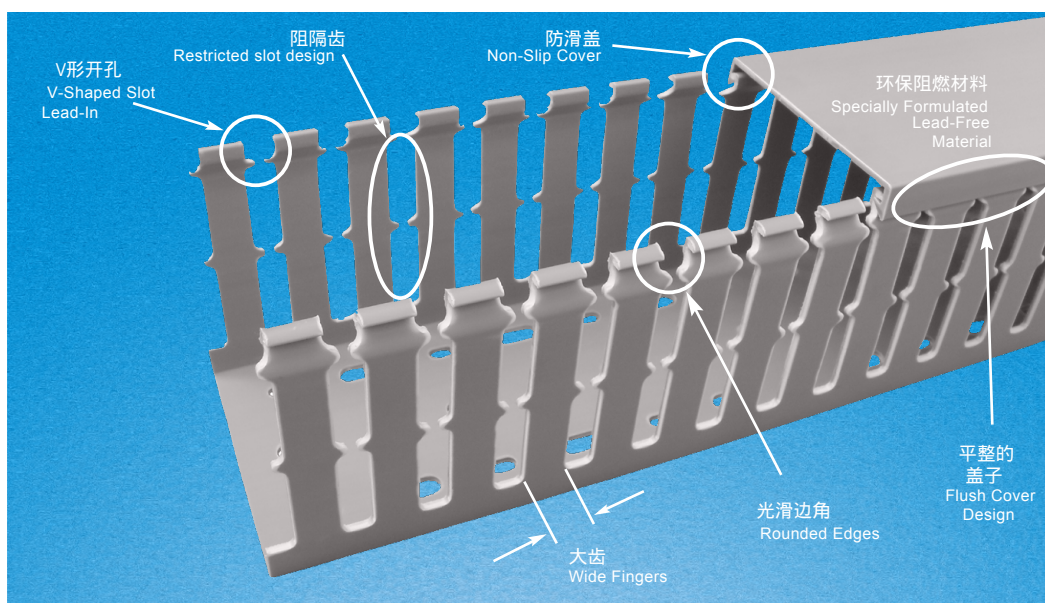

特点/Features	优点/Advantages	益处/Benefits
大的齿和大的孔 Wide finger and slot design Can be used with a wide range of wire and	齿宽有12mm,孔宽8mm,齿硬度大 Finger 12mm Slot 8 mm,Rigid fingers	适用于较大的电线 bundle sizes
环保阻燃材料 Rohs approved Enviroment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
光滑的边角 Smooth rounded edges	齿的顶端和孔的边缘光滑 Smooth edges in duct slots and at top of duct fingers	防止电线和手被毛刺割伤 Protects hands and wiring/cabling from abrasion
防滑盖 (non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover designGreater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
冲孔断面/Slot smooth	冲孔后齿的表面平整光滑 Smooth adge after punching	不用修毛刺,节省时间 No need to get offer abrasion, save time
V型开孔设计 V-shaped slot lead-in V-shape funnels wires into slot for	V型槽孔使电线更易装入 Easier insertion	加快电线安装 Speeds wire installation
阻隔齿设计 Restricted slot designOnce inserted wires are retained in the slot	电线装入后不会晃动,不管是否扣盖子 也可用于电线功能不同的分类 with or without the cover being installed	安装时避免线跑出槽不必要的麻烦,节省时间 Eliminates hassle and saves time during installation and maintenance
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers'request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, EuropeCE ,ROHS,REACH Flamility and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在世界各地均可放心使用 Can provide related certificates of the projects or parts need



