


## RCCN 日成NBL型金属软管防水接头 Metal Flexible Conduit Fittings



推荐

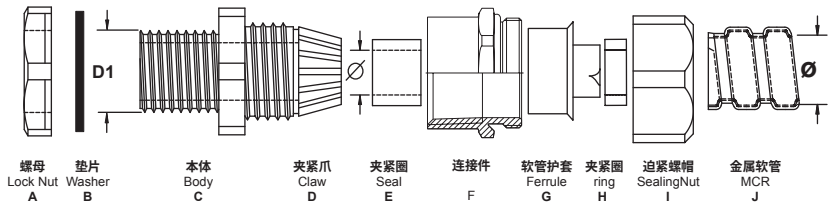

螺母 Lock Nut A 垫片 Washer B 本体 Body C 夹爪 Claw D 夹紧圈 Seal E 连接件 F 软管护套 Ferrule G 夹紧圈 ring H 压紧螺帽 Sealing Nut I 金属软管 MCR J

螺牙规格:管螺纹G/PT牙,公制螺紋Metric,德制螺紋 PG  
产品材质:A.C.F.I部位均采用黄铜镀镍制.

B.E.H采用丁腈橡胶(NBR)制成.G为铁皮制成.

产品认证:欧洲CE,欧洲环保RoHS

颜色种类:金属色(黄)

防护等级:IP67, 如需IP68需配套日成含胶管SCM二次保护接头.

工作温度:-40°C至100°C,瞬间可耐高达120°C.

产品特性: 1.外型美观,结构紧密,强度更高.

2.软管护套设计与软管相扣接紧之设计,配合迫紧头装配省时便利,抗拉力特强.

3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂.

4.除以下标准规格外,可另按需求任意变动大小及螺纹标准.

备注:成品均配带螺母A及防水垫片B,可定制特殊规格不同的螺纹和配套管.

Thread:G,Metric, PG

Material:A.C.F.I are made from Brass metal.B.E are made of rubber (NBR).D is made of sheet iron

Certificates:CE,ROHS

Color:Argentine(yellow)

Protect:IP67,if request IP68, need to use with RCCN SCM connectors

Operate T.: -40°C to 100°C, 120°C in a short time.

Products characteristics: 1.thickness added zinc metal,good looking

2.common impregnant resistant,such as water,salty, alcohol,oil, grease and so on.

3.we can adjust the sizes according to your request.

4.special sizes can be produced

Remarks:The finished goods are including locknut and washer.



单位/Unit:mm

| 型号<br>Item No. | 螺牙标准<br>Thread | 适用电缆<br>Cable Range | 配套日成金属软管MCR<br>Suitable RCCN metal flexible conduit MCR |                   |               | 螺纹外径<br>Thread<br>O.D.<br>D1 | 螺纹长度<br>Thread<br>Length<br>L1 | 包装<br>Packing<br>pcs |
|----------------|----------------|---------------------|---------------------------------------------------------|-------------------|---------------|------------------------------|--------------------------------|----------------------|
|                |                |                     | 对应型号<br>Corresponding<br>item no                        | 公制<br>Metric<br>ø | 英制<br>British |                              |                                |                      |

## 公制螺牙/Metric thread NBL-M

|         |         |       |        |     |        |         |    |    |
|---------|---------|-------|--------|-----|--------|---------|----|----|
| NBL-03M | M16*1.5 | 4-8   | MCR-03 | 10  | 1/4"   | M16*1.5 | 8  | 50 |
| NBL-04M | M16*1.5 | 6-10  | MCR-04 | 13  | 3/8"   | M16*1.5 | 11 | 50 |
| NBL-05M | M20*1.5 | 8-12  | MCR-05 | 16  | 1/2"   | M20*1.5 | 14 | 50 |
| NBL-06M | M25*1.5 | 8-12  | MCR-06 | 20  | 3/4"   | M25*1.5 | 14 | 50 |
| NBL-08M | M32*1.5 | 15-21 | MCR-08 | 25  | 1"     | M32*1.5 | 15 | 50 |
| NBL-10M | M40*1.5 | 18-25 | MCR-10 | 32  | 1 1/4" | M40*1.5 | 15 | 25 |
| NBL-12M | M50*1.5 | 26-32 | MCR-12 | 38  | 1 1/2" | M50*1.5 | 16 | 25 |
| NBL-16M | M63*1.5 | 37-44 | MCR-16 | 51  | 2"     | M63*1.5 | 18 | 10 |
| NBL-20M | M72*2   | 42-52 | MCR-20 | 64  | 2 1/2" | M72*2   | 22 | 10 |
| NBL-24M | M88*2   | 55-62 | MCR-24 | 80  | 3"     | M88*2   | 22 | 5  |
| NBL-32M | M 114*2 | 78-84 | MCR-32 | 100 | 4"     | M 114*2 | 24 | 5  |

## 德制螺牙 /Metric thread NBL-P

|         |        |       |        |    |        |      |    |    |
|---------|--------|-------|--------|----|--------|------|----|----|
| NBL-03P | PG9    | 4-8   | MCR-03 | 10 | 1/4"   | 15.2 | 8  | 50 |
| NBL-04P | PG 11  | 6-10  | MCR-04 | 13 | 3/8"   | 18.6 | 9  | 50 |
| NBL-05P | PG13.5 | 8-12  | MCR-05 | 16 | 1/2"   | 20.4 | 11 | 50 |
| NBL-06P | PG21   | 13-18 | MCR-06 | 20 | 3/4"   | 28.3 | 14 | 50 |
| NBL-08P | PG29   | 18-25 | MCR-08 | 25 | 1"     | 37.0 | 15 | 50 |
| NBL-10P | PG29   | 18-25 | MCR-10 | 32 | 1 1/4" | 37.0 | 15 | 25 |
| NBL-12P | PG36   | 26-32 | MCR-12 | 38 | 1 1/2" | 47.0 | 16 | 25 |
| NBL-16P | PG48   | 37-44 | MCR-16 | 51 | 2"     | 59.3 | 18 | 10 |

## 管螺牙 /Tube thread NBL-G

|         |         |       |        |    |        |       |    |    |
|---------|---------|-------|--------|----|--------|-------|----|----|
| NBL-03G | G3/8"   | 4-8   | MCR-03 | 10 | 1/4"   | 16.66 | 8  | 50 |
| NBL-04G | G3/8"   | 6-10  | MCR-04 | 13 | 3/8"   | 16.66 | 8  | 50 |
| NBL-05G | G1/2"   | 8-12  | MCR-05 | 16 | 1/2"   | 20.95 | 11 | 50 |
| NBL-06G | G3/4"   | 13-18 | MCR-06 | 20 | 3/4"   | 26.44 | 14 | 50 |
| NBL-08G | G1"     | 15-21 | MCR-08 | 25 | 1"     | 33.25 | 15 | 50 |
| NBL-10G | G1 1/4" | 22-28 | MCR-10 | 32 | 1 1/4" | 41.91 | 15 | 25 |
| NBL-12G | G1 1/2" | 26-32 | MCR-12 | 38 | 1 1/2" | 47.8  | 16 | 25 |
| NBL-16G | G2"     | 37-44 | MCR-16 | 51 | 2"     | 59.6  | 18 | 10 |

