



RCCN 日成MCLS型不锈钢金属软管 Liquid-Tight Metal Flexible Conduit



日成MCLS型金属软管
RCCN MCLS type metal flexible conduit

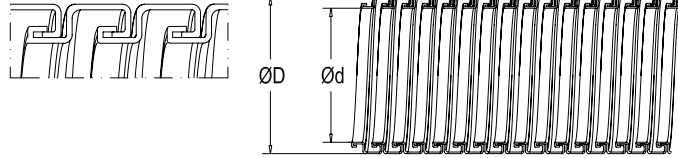

产品材质:(内层):不锈钢带。(外层):PVC(黑色抗紫外线,防老化)

产品认证:欧洲CE,欧洲环保RoHS

防火等级:UL94V-0,低烟无毒 颜色种类:黑色或灰色

工作温度:-30°C到+85°C,瞬间可耐高达100°C

产品特性:1软管有极佳的防水,绝缘性,抗拉性

2表面加厚层PVC被覆,外表平滑,且PVC塑料添加防火阻燃剂,并加抗UV紫外线和防止老化作用之成份。

3结构为反扣型增加抗拉强度,不容易折断或变形。

4具超柔软与极佳弯曲性能,内部平滑构造在穿引电线时极容易。

应用领域:各种昂贵设备,发电厂,化工设备,输配电系统,基地台架设,及屋外露出部分之配线保护。

使用方法:先将电线穿入管内,再配合金属软管固定头即可。

用途:保护电线电缆以及达到绝缘,防水,并可增进线缆弯曲美观。

交期:1-2周,有起订量要求。环保型软管型号例:MCLS-06B/ROHS

Material:(inner):stainless steel tape

(outer):PVC(black,UV resistant)

Certificates:CE, RoHS

Fireproof class:UL94V-2,low smoking,potion free

Color:black, gray

Work T.: -30°C to +85°C, 100°C in a short time

Products Characteristics:1.good waterproof,insulated,retension

2.PVC wrapped, PVC is UV and inflammation resistant

3.uneasy to break and construction changing, for its special design

4.smooth inside, make the wire and cable install easily

Use domain:railway,communicate project,air-dondition,machines.roboticized equipments,power plant ships and so on

Use way:insert the cables into the conduit, then fix the correct connectors.

Delivery time:1-2 weeks,come with MOQ

Rohs approved part no. like:MCLS-06B/ROHS

单位/Unit:mm

型号 Item No.		规格 Trade Sizes		内径 I.D. d	外径 O.D. D	弯曲半径 Bending Radius mm ± 10%	配套金属头 Suitable metal connector NBG	包装 Packing M
黑色Black	灰色Gray	公制 Metric ø	英制 British					
MCLS2-03B	MCLS2-03G	ø 10	1/4"	10.0±0.3	15.0±0.5	50	NBG-03	50M
MCLS2-04B	MCLS2-04G	ø 13	3/8"	12.5±0.3	17.5±0.5	60	NBG-04	50M
MCLS2-05B	MCLS2-05G	ø 16	1/2"	15.5±0.3	21.2±0.5	75	NBG-05	50M
MCLS2-06B	MCLS2-06G	ø 20	3/4"	20.0±0.3	26.0±0.5	100	NBG-06	30M
MCLS2-08B	MCLS2-08G	ø 25	1"	25.0±0.3	31.5±0.5	100	NBG-08	30M
MCLS2-10B	MCLS2-10G	ø 32	1 1/4"	32.0±0.3	39.5±0.5	135	NBG-10	20M
MCLS2-12B	MCLS2-12G	ø 38	1 1/2"	38.0±0.3	45.8±0.5	160	NBG-12	20M
MCLS2-16B	MCLS2-16G	ø 51	2"	51.0±0.3	60.0±0.5	190	NBG-16	15M

RCCN 日成MCR-EX型防爆金属软管 Non-Jacket Metal Flexible Conduit



单位/Unit:mm

型号 Item No.	规格		内径 I.D. d	外径 O.D. D	配套金属头 Suitable metal connector NBG	包装 Packing M
	公制 Metric ø	英制 British				
MCR-03EX	ø 10	1/4"	10.0±0.3	15.5±0.5	NBG-03	50M
MCR-04EX	ø 13	3/8"	12.5±0.3	17.5±0.5	NBG-04	50M
MCR-05EX	ø 16	1/2"	15.5±0.3	21.5±0.5	NBG-05	50M
MCR-06EX	ø 20	3/4"	20.0±0.3	26.8±0.5	NBG-06	25M
MCS-08EX	ø 25	1"	25.0±0.3	33.5±0.5	NBG-08	25M
MCS-10EX	ø 32	1 1/4"	32.0±0.3	42.0±0.5	NBG-10	10M
MCS-12EX	ø 38	1 1/2"	38.0±0.3	48.2±0.5	NBG-12	10M
MCS-16EX	ø 51	2"	50.0±0.3	61.3±0.5	NBG-16	5M

产品材质:(内层):热浸镀锌钢板及特殊绝缘处理。

(中层):PVC(黑色抗紫外线,防老化),(外层):不锈钢带编织网。

产品认证:欧洲CE,欧洲环保RoHS

防火等级:UL94V-0,低烟无毒

产品特性:强度高,不易变形,弯曲性差。

应用领域:各种高温环境或防爆设备之配线保护。

使用方法:先将电线穿入管内,再配合金属软管固定头即可。

用途:保护电线电缆以及达到绝缘,防水,并可增进线缆弯曲美观。

交期:2-4周,有起订量要求。

Material:(inner):zinc coated steel, special insulated processed.

(middle):PVC(black,UV resistant).(outer):stainless steel tape sleeve

Certificates:CE, RoHS

Products Characteristics:Economic,soft and perfect flexible, easy to install wires or cables

Use domain:protect cable or wired in house, equipments and so on.

Use way:insert the cables into the conduit

Functions:protect wires and cables, insulated,waterproof

Delivery time:2-4 weeks,come with MOQ