



Richeng AC exchange fan

AC exchange fan

Motor: cover motor structure

Frame: black paint aluminum alloy die-casting anti-corrosion, moisture-proof structure

Blade: injection molding, PBT + 30% glass + V0 grade flame retardant

Bearing: high precision, long life imported ball bearings; low noise imported oil bearing

Insulation: enameled wire with B-class insulation, temperature 120 °C

Insulation resistance: 500 megohm above

Withstanding voltage: leakage current 0.5A. Withstand voltage 1500V / 1 minute

Operating temperature: -10 °C ~ 70 °C

Storage temperature: -40 °C ~ 70 °C


Operating voltage: 115V (voltage range: 85V ~ 125V)

220V (voltage range: 185V ~ 245V)

Working life: ball bearing (60000 hours) Ambient temperature: 25 °C

AC fan fan AC fan principle

Specification

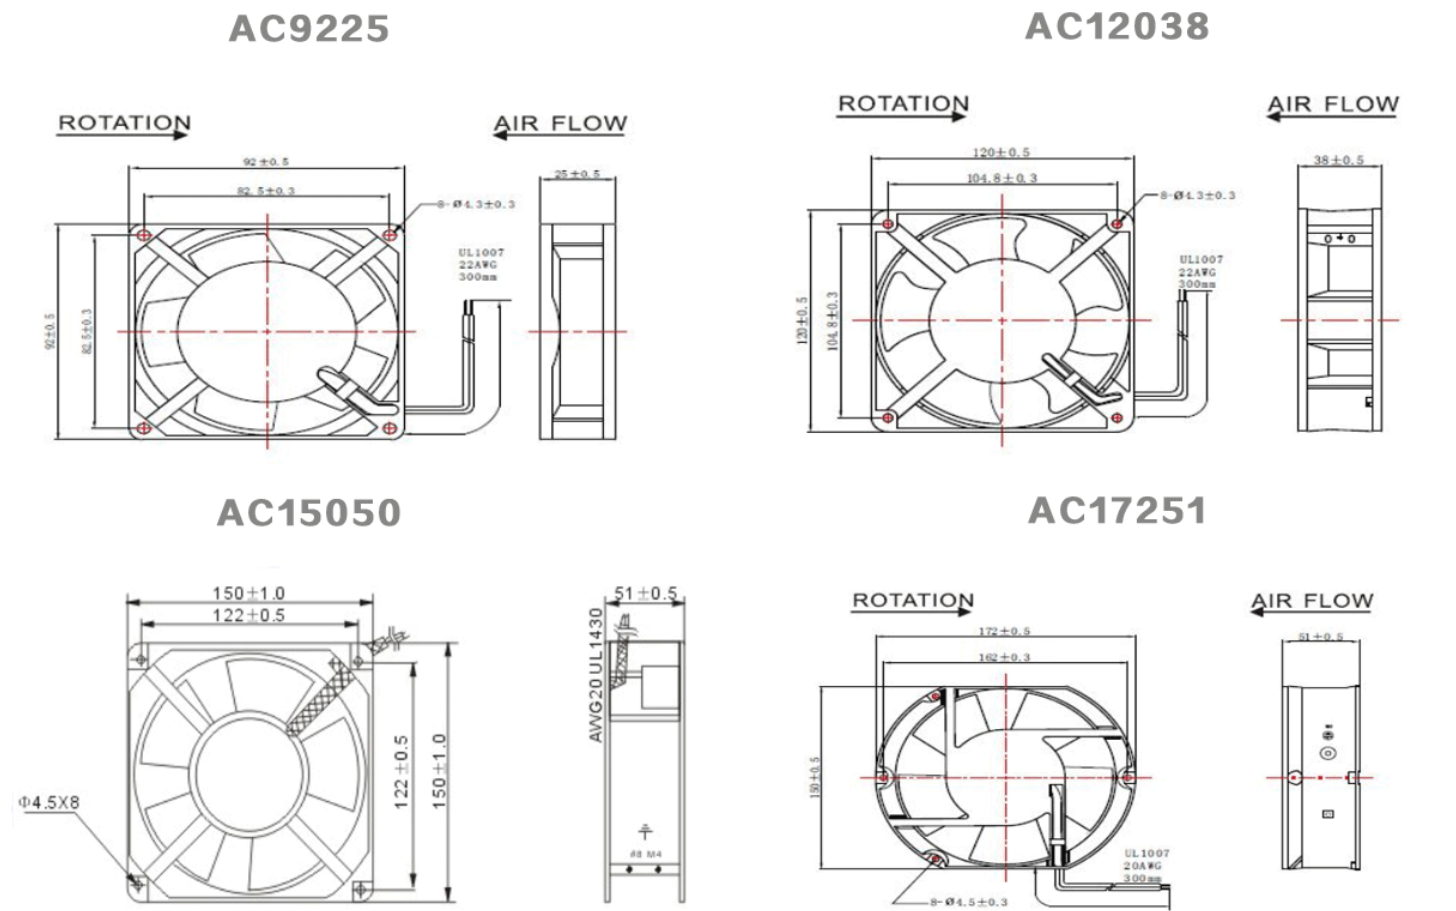

Model No.	(VAC)	(Hz)	(AMP)	(WATTS)	(R/min)	(m3/min)	(CFM)	(mm-H2O)	(dBA)	(Kg)
AC9225	220/240V	50/60	0.07/0.06	13/11W	2250/2700	0.85/1.05	30/37	3.30/4.83	33/38	0.27
AC12038	220/240V	50/60	0.14/0.12	23/21W	2700/3100	2.68/3.25	45/49	8.38/9.65	45/49	0.55
AC15050	220/240V	50/60	0.22/0.21	38/35W	2700/3100	5.37/6.88	180/200	17.10/18.88	57/62	0.95
AC17251	220/240V	50/60	0.22/0.21	38/35W	2700/3100	5.37/6.88	180/200	17.10/18.88	57/62	0.95

Product Show



