



Pre-insulated terminal

Pre-insulated terminal LVB/LVA

Product Material: Terminal made of high quality copper, good conductivity, high quality ROHS-PVC jacket made of durable anti-aging.

Features: The use of high-quality matte plating, greatly extended anti-rust time, no sharp parts; supporting the daily terminal crimping tools can be pressed wire, beautiful wiring,

International Certification: EU RoHS environmental certification, the European CE certification.

Product Features: Excellent quality, cracked loose open after compression, -40 degrees heat to 85 degrees normal use.


How to use: peel the wire skin, into the terminal after the brass

Pre-insulated terminal LVB / LVA Specials, a limited number, while stocks last. Larger price is better.



Terminals insulated terminals cold-pressed terminals

Specification

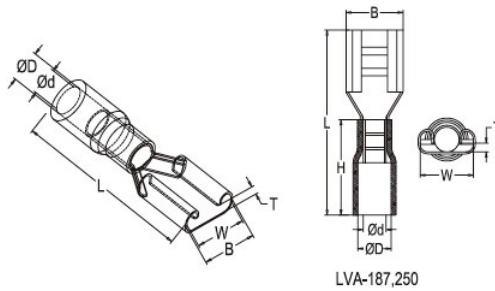

Item no	quantity	price/pcs
LVA1.25-110(5)(R07)	39605	0.098
LVA1.25-110(5)(R09)	4920	0.098
LVB1.25-187(8)(R07)	2950	0.122
LVB1.25-110(8)(R07)	420	0.112
LVB1.25-110(8)(R09)	8995	0.061
LVB2-250(R07)	1754	0.159
LVB2-250(R09)	2000	0.104