



RCCN®

## AX-X3 Auxiliary contact、AL-X3 Alarm auxiliary contact

### Alarm auxiliary contact

Meet the standard: GB/T14048.5, IEC60947-5-1

Compliance with certification: CCC, CE

Main functions of AX-X3: Assembled with circuit breaker to realize signal indication of long-distance circuit breaker switching

AL-X3 main function: circuit breaker assembly, signal indication for long-distance circuit breaker on and off



Auxiliary contact、Alarm auxiliary contact



## Specification

### AX-X3

#### 参数与性能

不同额定工作电压下的额定工作电流：


表1

使用类别	额定工作电压 ( V )	额定工作电流 ( A )
AC-12	AC 415	3
	AC 240	6
DC-12	DC 130	1
	DC 48	2
	DC 24	6

动作特性：辅助触头接线原理见图1。当辅助触头分闸时，11、12端子接通；当辅助触头合闸时，11、14端子接通。

寿命：辅助触头的操作寿命不低于1万次。

图1



### AL-X3

## 参数与性能

### 不同额定工作电压下的额定工作电流


表1

使用类别	额定工作电压 ( V )	额定工作电流 ( A )
AC-12	AC 415	3
	AC 240	6
DC-12	DC 130	1
	DC 48	2
	DC 24	6

动作特性：报警辅助触头接线原理见图1。

当报警辅助触头分闸时，91、94端子接通；当报警辅助触头合闸时，91、92端子接通；当报警辅助触头合闸后人为使手柄分闸时，91、92端子仍然接通；当报警辅助触头合闸后拼装的断路器故障脱扣分闸时，91、92端子断开，91、94端子接通；

寿命：报警辅助触头的操作寿命不低于1万次。

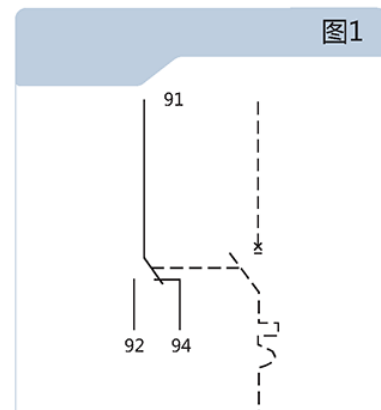

## Product Show

## Download



Hot Sale Catalogue



Catalogue-PDF



ISO9001



ISO/TS16949

## Related Proutct

Z



AX-X3 Auxiliary contac...  
Alarm auxiliary contact

More

[Product CHNT Electric >](#)