



PCF female thread straight-through pipe joint

PCF female thread straight-through pipe joint

Material: plastic socket: POM, imported sealing ring: stainless steel circlip, body: brass


Operating pressure range: 0-10kgf/cm²

Operating temperature range: -20~70°C


General hose: PU tube or nylon hose

Color: plastic socket: blue, body: brass (no plating)

1. Compact appearance, saving installation space and high cost performance.
2. The threaded part is coated with sealant to ensure that there is no leakage in the threaded connection part.
3. The color of the plastic interface part is available in blue, white, and black to facilitate your overall piping needs.

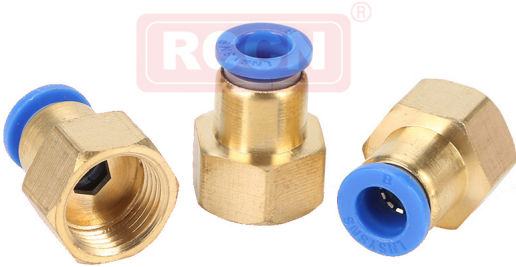

Specification



Item No.	OD	Connection thread/R	Package /PCS
PCF4-M5	4	M5x0.8	100
PCF4-01	4	PT1/8	100
PCF4-02	4	PT1/4	100
PCF4-04	4	PT1/2	100
PCF6-M5	6	M5x0.8	100
PCF6-01	6	PT1/8	100
PCF6-02	6	PT1/4	100
PCF6-03	6	PT3/8	100
PCF6-04	6	PT1/2	100
PCF8-01	8	PT1/8	100
PCF8-02	8	PT1/4	100
PCF8-03	8	PT3/8	100
PCF8-04	8	PT1/2	100
PCF10-01	10	PT1/8	100
PCF10-02	10	PT1/4	100
PCF10-03	10	PT3/8	100
PCF10-04	10	PT1/2	50
PCF12-01	12	PT1/8	100
PCF12-02	12	PT1/4	100
PCF12-03	12	PT3/8	100
PCF12-04	12	PT1/2	50

Product Show



耐高压 & 不脱扣


能够承受更大更强而不脱扣，安装方便，使用寿命长


精工压铸

坚固耐用

杜绝漏气



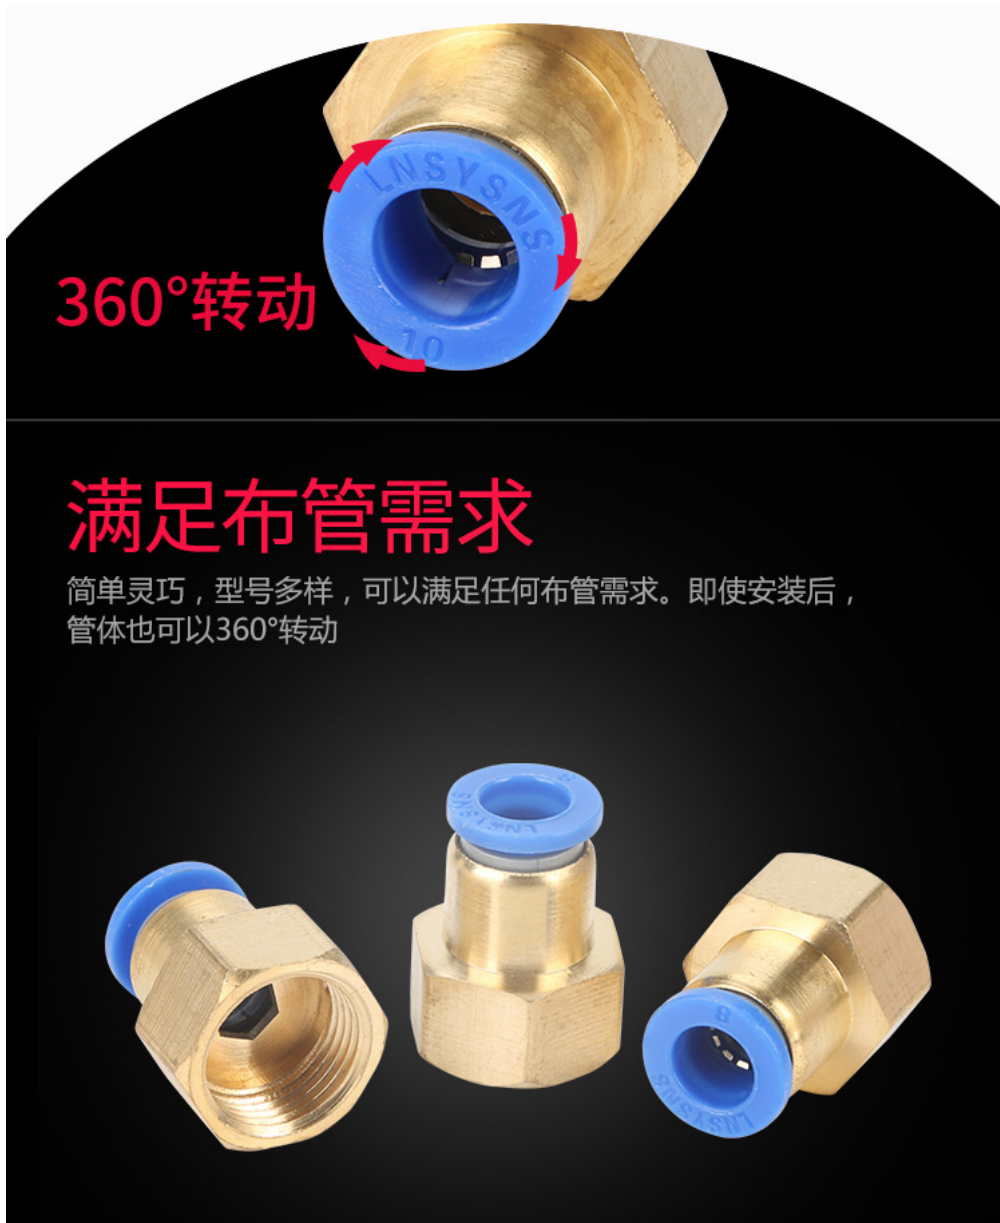

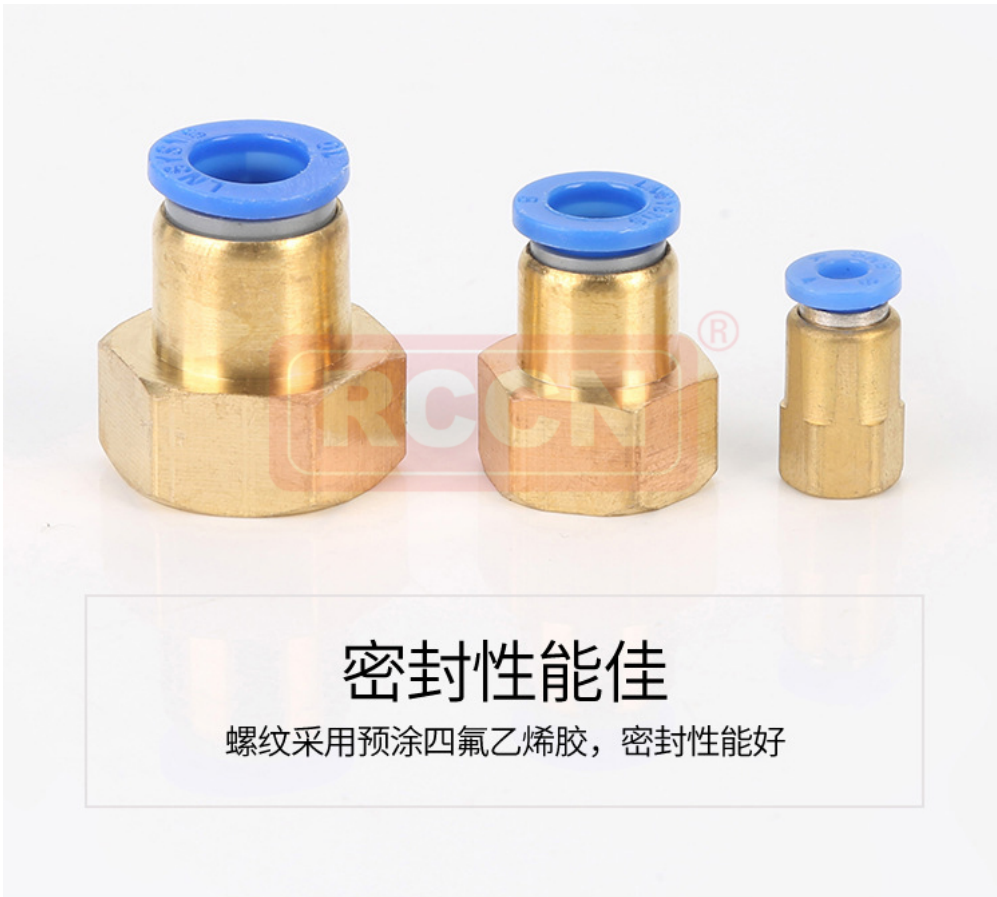

EXQUISITE QUALITY
严格工艺 精湛品质
更精密的工艺 更高品质的产品

5 BIG COMMITMENT TO LET YOU IN SUIHNG FURNITURE STRICT WORKMANSHIP
EXQUISITE QUALITY SHOPPING WORRY FREE



