


RCCN 日成HVDRFZ型易折断环保阻燃线槽Narrow Slot Wiring Duct


出口推荐/Recommend

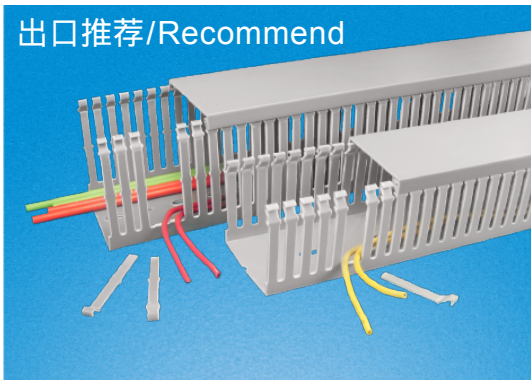


产品材质:采用低卤素硬质PVC料制成,环保无
污染,不含铅等有毒物。
产品认证:美国UL:E306674 欧洲CE:EN50085
欧洲环保RoHS,REACH。
防火等级:UL94V-0,低烟微卤,遇火不燃烧,防
火性及绝缘性特佳。
产品构造:由槽底及槽盖组成,底槽两侧设有
出线孔。
颜色:灰色,白色,蓝色,黑色
(可定制其它颜色,有起订量要求)
工作温度:静态-40°C持续高温至65°C,短时
间可达85°C。
使用方法:先将底槽固定,将所要配的线装入
槽内,盖上槽盖即可。
产品特性:1.反扣式槽盖与槽体设计组合后
绝不脱落,且接合面平滑,
不割伤手及擦损附近配线。
2.配线槽65°C内不易断裂,变形,
变色,装配省时便利。
3.出线孔低、组合容易、拆卸简
单、易于配线。
4.易折断型为内部两侧带折痕设计,
可依安装者需求,折出需要的边
孔大小。更多选择:量大可按需求
生产所需规格或定制长度。
例:HVDR8080FZ(L=1.7M)

Wide slot/finger design provides
greater sidewall rigidity and can
be used with a wide range of wire
bundle sizes。
Certificates:UL:E306674
CE:EN50085 RoHS,REACH。
Made of rigid PVC
Work Temperature:-40°C to 65°C
UL94 Flammability Rating of V-0
Provided with mounting holes
Available color:gray,white,blue,black
and other special colors
Special design: with score line at the
base of trunking, it makes
the fingers easy to separate from the
trunking no need to us cutter.


推荐:灰色为常规库存产品,其它颜色有起订量要求。
Comment:gray is standard color,other color come with MOQ.




样式: 16mm-75mm高
Type: 16mm-75mm Height



样式: 80mm-150mm高
Type: 80mm-150mm Height




样式: 16mm-72mm宽
Style: Width from 16mm to 72mm



可定制大小孔/EU Hole of DIN

样式: 75mm-140mm宽
Style: Width from 75mm to 140mm



150宽为5排底孔
150 width with 5 lines holes


单位/Unit:mm

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
HVDR1525FZ	HVDR1525FZW	HVDR1525FZE	HVDR1525FZB	15×25	5	5	5~15pcs	每支 2米
HVDR2025FZ	HVDR2025FZW	HVDR2025FZE	HVDR2025FZB	20×25	4	6	5~15pcs	
HVDR2525FZ	HVDR2525FZW	HVDR2525FZE	HVDR2525FZB	25×25	4	6	10~25pcs	
HVDR3025FZ	HVDR3025FZW	HVDR3025FZE	HVDR3025FZB	30×25	4	6	12~28pcs	
HVDR4025FZ	HVDR4025FZW	HVDR4025FZE	HVDR4025FZB	40×25	4	6	20~35pcs	
HVDR5025FZ	HVDR5025FZW	HVDR5025FZE	HVDR5025FZB	50×25	4	6	12~28pcs	
HVDR1530FZ	HVDR1530FZW	HVDR1530FZE	HVDR1530FZB	15×30	4	6	8~15pcs	
HVDR2030FZ	HVDR2030FZW	HVDR2030FZE	HVDR2030FZB	20×30	4	6	25~35pcs	
HVDR2530FZ	HVDR2530FZW	HVDR2530FZE	HVDR2530FZB	25×30	4	6	25~35pcs	
HVDR3030FZ	HVDR3030FZW	HVDR3030FZE	HVDR3030FZB	30×30	4	6	25~35pcs	
HVDR4030FZ	HVDR4030FZW	HVDR4030FZE	HVDR4030FZB	40×30	4	6	30~40pcs	
HVDR5030FZ	HVDR5030FZW	HVDR5030FZE	HVDR5030FZB	50×30	4	6	40~50pcs	
HVDR6030FZ	HVDR6030FZW	HVDR6030FZE	HVDR6030FZB	60×30	4	6	50~60pcs	含槽底槽盖
HVDR2233FZ	HVDR2233FZW	HVDR2233FZE	HVDR2233FZB	22×33	4	6	25~35pcs	
HVDR3333FZ	HVDR3333FZW	HVDR3333FZE	HVDR3333FZB	33×33	4	6	35~45pcs	
HVDR2035FZ	HVDR2035FZW	HVDR2035FZE	HVDR2035FZB	20×35	4	6	30~40pcs	
HVDR3535FZ	HVDR3535FZW	HVDR3535FZE	HVDR3535FZB	35×35	4	6	35~45pcs	
HVDR5035FZ	HVDR5035FZW	HVDR5035FZE	HVDR5035FZB	50×35	4	6	40~60pcs	
HVDR2040FZ	HVDR2040FZW	HVDR2040FZE	HVDR2040FZB	20×40	4	6	16~22pcs	
HVDR2540FZ	HVDR2540FZW	HVDR2540FZE	HVDR2540FZB	25×40	4	6	20~35pcs	
HVDR3540FZ	HVDR3540FZW	HVDR3540FZE	HVDR3540FZB	35×40	4	6	30~45pcs	
HVDR4040FZ	HVDR4040FZW	HVDR4040FZE	HVDR4040FZB	40×40	4	6	60~70pcs	
HVDR6040FZ	HVDR6040FZW	HVDR6040FZE	HVDR6040FZB	60×40	4	6	100~115pcs	Including tuning and lids
HVDR8040FZ	HVDR8040FZW	HVDR8040FZE	HVDR8040FZB	80×40	4	6	120~135pcs	
HVDR10040FZ	HVDR10040FZW	HVDR10040FZE	HVDR10040FZB	100×40	4	6	120~135pcs	
HVDR12040FZ	HVDR12040FZW	HVDR12040FZE	HVDR12040FZB	120×40	4	6	140~155pcs	

RCCN 日成HVDRFZ型易折断环保阻燃线槽 Narrow Slot Wiring Duct


型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
HVDR2545FZ	HVDR2545FZW	HVDR2545FZE	HVDR2545FZB	25×45	4	6	20~25pcs	每支 2米 含槽底槽盖
HVDR3345FZ	HVDR3345FZW	HVDR3345FZE	HVDR3345FZB	33×45	4	6	40~55pcs	
HVDR4545FZ	HVDR4545FZW	HVDR4545FZE	HVDR4545FZB	45×45	4	6	60~70pcs	
HVDR6545FZ	HVDR6545FZW	HVDR6545FZE	HVDR6545FZB	65×45	4	6	110~120pcs	
HVDR2550FZ	HVDR2550FZW	HVDR2550FZE	HVDR2550FZB	25×50	4	6	20~30pcs	
HVDR3050FZ	HVDR3050FZW	HVDR3050FZE	HVDR3050FZB	30×50	4	6	25~40pcs	
HVDR3550FZ	HVDR3550FZW	HVDR3550FZE	HVDR3550FZB	35×50	4	6	40~60pcs	
HVDR4050FZ	HVDR4050FZW	HVDR4050FZE	HVDR4050FZB	40×50	4	6	60~70pcs	
HVDR4550FZ	HVDR4550FZW	HVDR4550FZE	HVDR4550FZB	45×50	4	6	70~80pcs	
HVDR5050FZ	HVDR5050FZW	HVDR5050FZE	HVDR5050FZB	50×50	4	6	80~90pcs	
HVDR5550FZ	HVDR5550FZW	HVDR5550FZE	HVDR5550FZB	55×50	4	6	85~95pcs	Pcs/Branch 2M Including tuning and lids
HVDR6050FZ	HVDR6050FZW	HVDR6050FZE	HVDR6050FZB	60×50	4	6	100~120pcs	
HVDR7550FZ	HVDR7550FZW	HVDR7550FZE	HVDR7550FZB	75×50	4	6	150~170pcs	
HVDR8050FZ	HVDR8050FZW	HVDR8050FZE	HVDR8050FZB	80×50	4	6	160~180pcs	
HVDR10050FZ	HVDR10050FZW	HVDR10050FZE	HVDR10050FZB	100×50	4	6	200~250pcs	
HVDR12555FZ	HVDR12555FZW	HVDR12555FZE	HVDR12555FZB	125×55	4	6	220~270pcs	
HVDR2060FZ	HVDR2060FZW	HVDR2060FZE	HVDR2060FZB	20×60	4	6	35~45pcs	
HVDR2560FZ	HVDR2560FZW	HVDR2560FZE	HVDR2560FZB	25×60	4	6	40~50pcs	
HVDR3060FZ	HVDR3060FZW	HVDR3060FZE	HVDR3060FZB	30×60	4	6	60~80pcs	
HVDR3560FZ	HVDR3560FZW	HVDR3560FZE	HVDR3560FZB	35×60	4	6	90~105pcs	
HVDR4060FZ	HVDR4060FZW	HVDR4060FZE	HVDR4060FZB	40×60	4	6	100~115pcs	每支 2米 含槽底槽盖
HVDR4560FZ	HVDR4560FZW	HVDR4560FZE	HVDR4560FZB	45×60	4	6	110~125pcs	
HVDR5060FZ	HVDR5060FZW	HVDR5060FZE	HVDR5060FZB	50×60	4	6	120~135pcs	
HVDR6060FZ	HVDR6060FZW	HVDR6060FZE	HVDR6060FZB	60×60	4	6	120~135pcs	
HVDR8060FZ	HVDR8060FZW	HVDR8060FZE	HVDR8060FZB	80×60	4	6	180~210pcs	
HVDR10060FZ	HVDR10060FZW	HVDR10060FZE	HVDR10060FZB	100×60	4	6	240~290pcs	
HVDR11060FZ	HVDR11060FZW	HVDR11060FZE	HVDR11060FZB	110×60	4	6	250~300pcs	
HVDR12060FZ	HVDR12060FZW	HVDR12060FZE	HVDR12060FZB	120×60	4	6	260~320pcs	
HVDR15060FZ	HVDR15060FZW	HVDR15060FZE	HVDR15060FZB	150×60	4	6	300~360pcs	
HVDR2565FZ	HVDR2565FZW	HVDR2565FZE	HVDR2565FZB	25×65	4	6	40~50pcs	Pcs/Branch 2M Including tuning and lids
HVDR3365FZ	HVDR3365FZW	HVDR3365FZE	HVDR3365FZB	33×65	4	6	40~70pcs	
HVDR4565FZ	HVDR4565FZW	HVDR4565FZE	HVDR4565FZB	45×65	4	6	110~120pcs	
HVDR6565FZ	HVDR6565FZW	HVDR6565FZE	HVDR6565FZB	65×65	4	6	180~200pcs	
HVDR7265FZ	HVDR7265FZW	HVDR7265FZE	HVDR7265FZB	72×65	4	6	180~230pcs	
HVDR2575FZ	HVDR2575FZW	HVDR2575FZE	HVDR2575FZB	25×75	4	6	150~180pcs	
HVDR3575FZ	HVDR3575FZW	HVDR3575FZE	HVDR3575FZB	35×75	4	6	160~190pcs	
HVDR5075FZ	HVDR5075FZW	HVDR5075FZE	HVDR5075FZB	50×75	4	6	180~210pcs	
HVDR7575FZ	HVDR7575FZW	HVDR7575FZE	HVDR7575FZB	75×75	4	6	200~240pcs	
HVDR10075FZ	HVDR10075FZW	HVDR10075FZE	HVDR10075FZB	100×75	4	6	250~290pcs	
HVDR2580FZ	HVDR2580FZW	HVDR2580FZE	HVDR2580FZB	25×80	4	6	100~120pcs	每支 2米 含槽底槽盖
HVDR3080FZ	HVDR3080FZW	HVDR3080FZE	HVDR3080FZB	30×80	4	6	110~125pcs	
HVDR3580FZ	HVDR3580FZW	HVDR3580FZE	HVDR3580FZB	35×80	4	6	110~130pcs	
HVDR4080FZ	HVDR4080FZW	HVDR4080FZE	HVDR4080FZB	40×80	4	6	140~160pcs	
HVDR4580FZ	HVDR4580FZW	HVDR4580FZE	HVDR4580FZB	45×80	4	6	140~160pcs	
HVDR5080FZ	HVDR5080FZW	HVDR5080FZE	HVDR5080FZB	50×80	4	6	160~180pcs	
HVDR5580FZ	HVDR5580FZW	HVDR5580FZE	HVDR5580FZB	55×80	4	6	160~180pcs	
HVDR6080FZ	HVDR6080FZW	HVDR6080FZE	HVDR6080FZB	60×80	4	6	180~210pcs	
HVDR8080FZ	HVDR8080FZW	HVDR8080FZE	HVDR8080FZB	80×80	4	6	240~290pcs	
HVDR10080FZ	HVDR10080FZW	HVDR10080FZE	HVDR10080FZB	100×80	4	6	260~350pcs	
HVDR12080FZ	HVDR12080FZW	HVDR12080FZE	HVDR12080FZB	120×80	4	6	280~380pcs	Pcs/Branch 2M Including tuning and lids
HVDR14080FZ	HVDR14080FZW	HVDR14080FZE	HVDR14080FZB	140×80	4	6	350~450pcs	
HVDR16080FZ	HVDR16080FZW	HVDR16080FZE	HVDR16080FZB	160×80	4	6	450~550pcs	
HVDR25100FZ	HVDR25100FZW	HVDR25100FZE	HVDR25100FZB	25×100	4	6	110~160pcs	
HVDR33100FZ	HVDR33100FZW	HVDR33100FZE	HVDR33100FZB	33×100	4	6	130~165pcs	
HVDR40100FZ	HVDR40100FZW	HVDR40100FZE	HVDR40100FZB	40×100	4	6	130~175pcs	
HVDR50100FZ	HVDR50100FZW	HVDR50100FZE	HVDR50100FZB	50×100	4	6	220~250pcs	
HVDR60100FZ	HVDR60100FZW	HVDR60100FZE	HVDR60100FZB	60×100	4	6	240~290pcs	
HVDR70100FZ	HVDR70100FZW	HVDR70100FZE	HVDR70100FZB	70×100	4	6	250~340pcs	
HVDR75100FZ	HVDR75100FZW	HVDR75100FZE	HVDR75100FZB	75×100	4	6	260~350pcs	
HVDR80100FZ	HVDR80100FZW	HVDR80100FZE	HVDR80100FZB	80×100	4	6	260~350pcs	每支 2米 含槽底槽盖
HVDR100100FZ	HVDR100100FZW	HVDR100100FZE	HVDR100100FZB	100×100	4	6	300~400pcs	
HVDR120100FZ	HVDR120100FZW	HVDR120100FZE	HVDR120100FZB	120×100	4	6	350~450pcs	
HVDR150100FZ	HVDR150100FZW	HVDR150100FZE	HVDR150100FZB	150×100	4	6	400~650pcs	
HVDR160100FZ	HVDR160100FZW	HVDR160100FZE	HVDR160100FZB	160×100	4	6	500~750pcs	
HVDR100130FZ	HVDR100130FZW	HVDR100130FZE	HVDR100130FZB	100×130	4	6	350~450pcs	
HVDR150130FZ	HVDR150130FZW	HVDR150130FZE	HVDR150130FZB	150×130	4	6	400~500pcs	
HVDR200100FZ	HVDR200100FZW	HVDR200100FZE	HVDR200100FZB	200×100	4	6	600~800pcs	
HVDR200150FZ	HVDR200150FZW	HVDR200150FZE	HVDR200150FZB	200×150	4	6	900~1200pcs	

RCCN 日成HVDRFZ型易折断环保阻燃线槽 Narrow Slot Wiring Duct

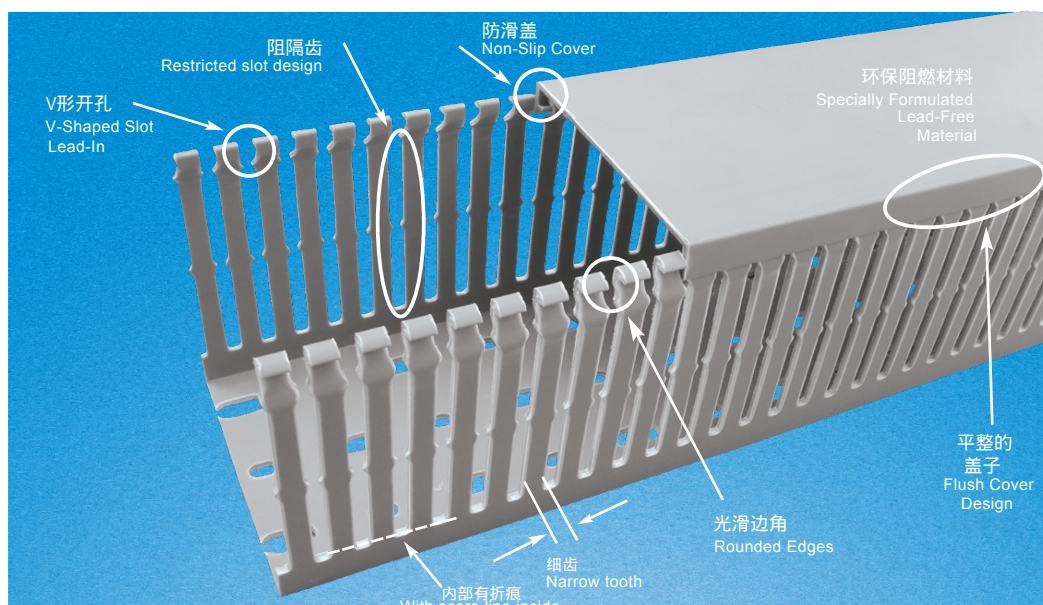

特点/Features	优点/Advantages	益处/Benefits
细的齿和细的孔 Narrow finger and slot designr	较近的电器接线空间满足高密度布线 Provides closer spacing for use with high-density applications	允许更多的布线,使布线效果整体美观 Allows further fanning of wires for neater wire management in high-density control panels
环保阻燃材料 Rohs approved Enviroment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
易折断型结构 Smooth rounded edges	方便安装时根据需要的侧孔大小走线折断齿 Exclusive RCCN ® process rounds the edges in duct slots and at top of duct fingers	减少安装时间,断面平整美观 Protects hands and wiring/cabling from abrasion
防滑盖 (non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover designGreater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
冲孔断面/Slot smooth	冲孔后齿的表面平整光滑 Smooth adge after punching	不用修毛刺,节省时间 No need to get offer abrasion, save time
V型开孔设计 V-shaped slot lead-in V-shape funnels wires into slot for	V型槽孔使电线更易装入 Easier insertion	加快电线安装 Speeds wire installation
阻隔齿设计 Restricted slot designOnce inserted wires are retained in the slot	电线装入后不会晃动,不管是否扣盖子 也可用于电线功能不同的分类 with or without the cover being installed	安装时避免线跑出槽不必要的麻烦,节省时间 Eliminates hassle and saves time during installation and maintenance
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers'request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, EuropeCE ,ROHS,REACH Flamility and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在世界各地均可放心使用 Can provide related certificates of the projects or parts need



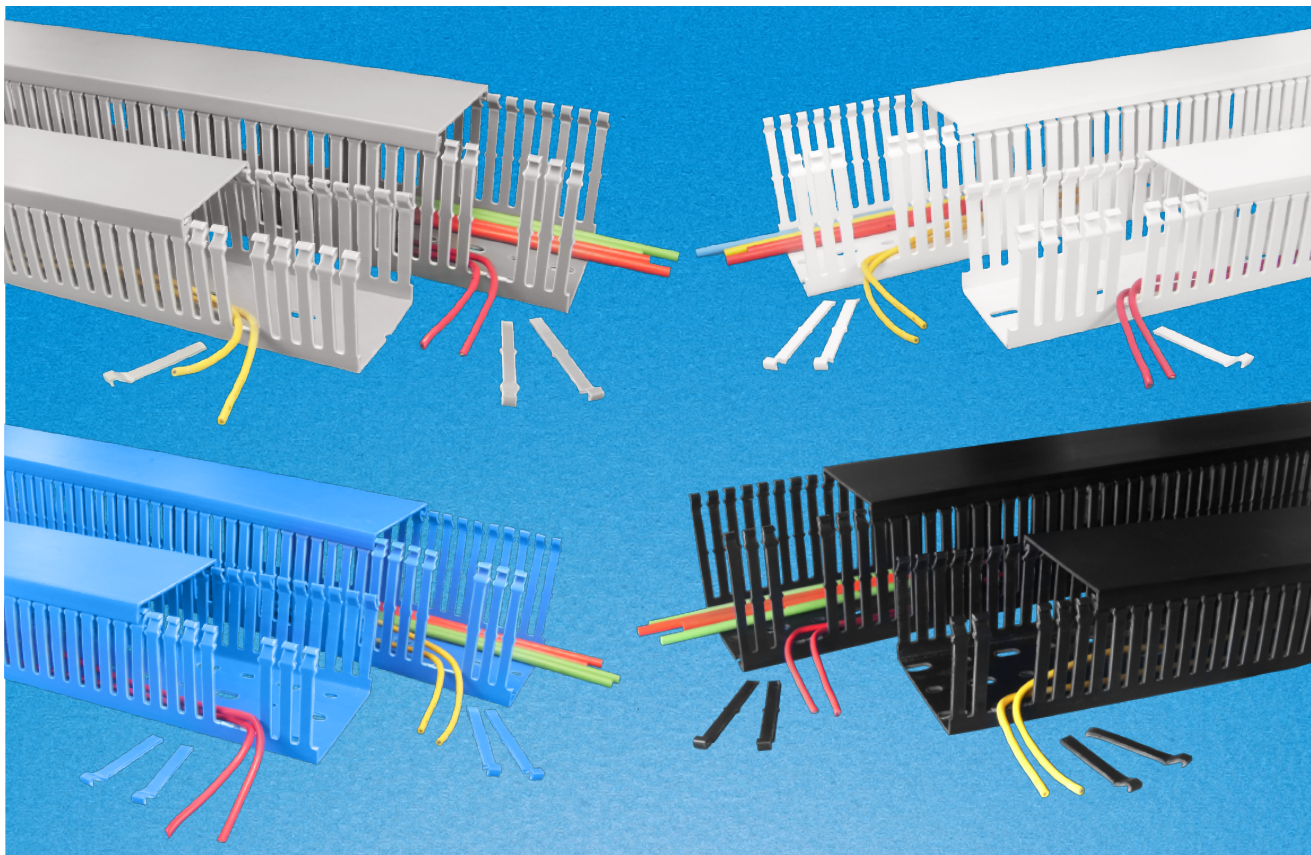

日成HVDFZ型易折断环保阻燃线槽

Narrow Slot Wiring Duct

