



RCCN 日成Y型裸端子 Y Non-Insul Ated Spade Terminals



说明：本系列配套工具 YTT-8
Note: installed by crimp tool YTT-8

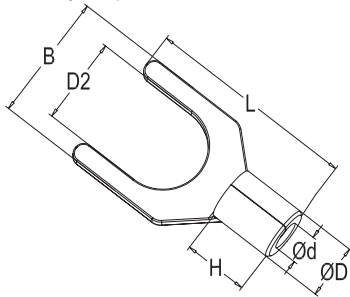

型号 Item No.	尺寸 DIMENSION							
	AWG mm ²	螺栓口直径 Dia. of bolt	B	L	F	H	D φ	d φ
	最大电流	D2	mm	mm	mm	mm	mm	mm
Y1.25-3	22-16 0.5-1.5 19A	3.2mm	5.7	16.0	6.5	4.8	3.4	1.7
YS1.25-3.5		3.7mm	5.7	16.0	6.5			
YL1.25-3.5		3.7mm	6.4	16.0	6.5			
YS1.25-4		4.3mm	6.4	16.0	6.5			
YM1.25-4		4.3mm	7.2	16.0	6.5			
YL1.25-4		4.3mm	8.1	16.0	6.5			
YS1.25-5		5.3mm	8.1	16.0	6.5			
YL1.25-5		5.3mm	9.5	16.0	6.5			
YS1.25-6	16-14 1.5-2.5 27A	6.4mm	9.5	16.0	6.5	4.8	4.1	2.3
YL1.25-6		6.4mm	12.0	22.0	11.0			
Y2-3		3.2mm	5.7	16.0	6.5			
YS2-3.5		3.7mm	5.7	16.0	6.5			
YL2-3.5		3.7mm	6.0	16.0	6.5			
YS2-4		4.3mm	6.4	16.0	6.5			
YM2-4		4.3mm	7.2	16.0	6.5			
YL2-4		4.3mm	8.1	16.0	6.5			
YS2-5	14-12 2.5-4 37A	5.3mm	8.1	16.0	6.5	6.0	5.0	3.0
YL2-5		5.3mm	9.3	16.0	6.5			
YS2-6		6.4mm	9.3	16.0	6.5			
YL2-6		6.4mm	12.0	22.0	11.0			
Y3.5-3		3.2mm	5.7	18.3	7.0			
Y3.5-4		4.3mm	8.0	18.3	7.0			
Y3.5-5		5.3mm	8.0	18.3	7.0			
Y3.5-6		6.5mm	12.0	21.5	7.0			
YS5.5-3.5	12-10 4-6 48A	3.7mm	7.2	17.4	7.5	6.8	5.6	3.4
Y5.5-3.5		3.7mm	8.3	18.5	7.0			
YS5.5-4		4.3mm	8.3	18.5	7.0			
YL5.5-4		4.3mm	9.0	18.5	7.0			
Y5.5-5		5.3mm	9.0	18.5	7.0			
YS5.5-6		6.4mm	9.0	18.5	7.0			
YL5.5-6		6.4mm	12.0	24.5	12.0			
Y5.5-8		8.4mm	14.0	23.5	10.5			
Y8-4	6-10 62A	4.3mm	9.0	20.8	8.1	8.5	7.2	4.5
Y8-5		5.3mm	9.0	20.8	8.1			
Y8-6		6.5mm	12.0	23.8	9.2			
Y8-8		8.4mm	13.8	25.4	10.7			
Y8-10		10.5mm	15.9	25.4	10.7			
Y14-4	10-16 88A	4.3mm	11.0	25.5	10.7	10.5	9.0	5.8
Y14-5		5.3mm	11.0	25.5	10.7			
Y14-6		6.5mm	11.0	25.5	10.7			
Y14-8		8.4mm	13.8	28.5	10.7			
Y14-10		10.5mm	15.9	28.5	10.7			
Y22-5	16-25 115A	5.3mm	11.0	27.7	9.5	12.0	11.5	7.7
Y22-6		6.5mm	11.0	27.7	9.5			
Y22-8		8.4mm	16.5	33.5	13.5			
Y22-10		10.5mm	16.5	33.5	13.5			
Y38-6	35-50 160A	6.5mm	15.9	35.0	13.5	14.0	13.3	9.4
Y38-8		8.4mm	15.9	35.0	13.5			
Y38-10		10.5mm	15.9	35.0	13.5			
Y38-12		13.0mm	19.0	38.0	15.5			